



*quick***light**

## QUICKSPOT 11W



### DATA SHEET

**The quickspot series is extremely easy to install and offers a wide variety of combination options with different light and housing colors.**

- High colour rendering index of CRI >90
- Light colors: 2700K / 3000K / 4000K
- Service life: 50,000 h LM-80
- Four different housing colors
- Quick installation using prepared 3-way WAGO connection terminal block

quicklight


# QUICKSPOT 11W

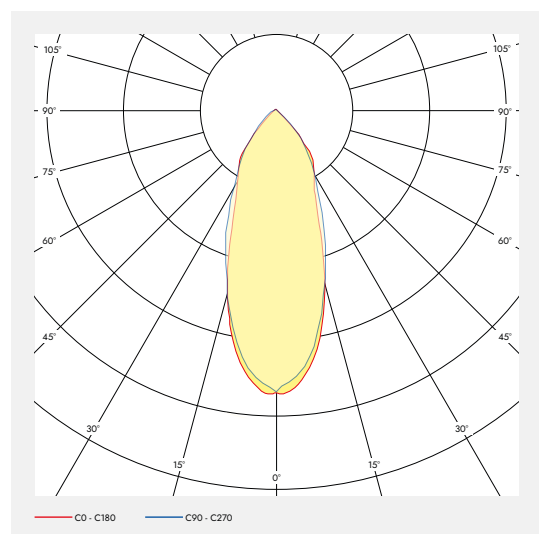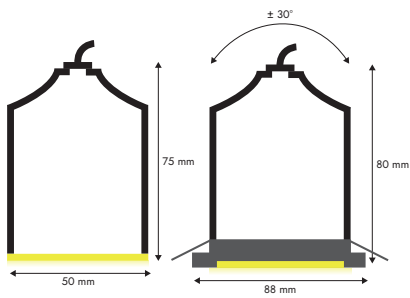

ART. NO.	DESIGNATION	CHARACTERISTICS									
1004961	quickspot without frame	230 VAC INPUT	11 W	38°	2700 K CRI>90	1085 LM	E A I G	L C	SDCM3		
1004960	quickspot without frame	230 VAC INPUT	11 W	38°	3000 K CRI>90	1125 LM	E A I G	L C	SDCM3		
1004962	quickspot without frame	230 VAC INPUT	11 W	38°	4000 K CRI>90	1170 LM	E A I G	L C	SDCM3		
1005562	quickspot nickel	68 mm	230 VAC INPUT	11 W	38°	2700 K CRI>90	1085 LM	E A I G	L C	SDCM3	
1005561	quickspot chrome	68 mm	230 VAC INPUT	11 W	38°	2700 K CRI>90	1085 LM	E A I G	L C	SDCM3	
1005563	quickspot black	68 mm	230 VAC INPUT	11 W	38°	2700 K CRI>90	1085 LM	E A I G	L C	SDCM3	
1005564	quickspot white	68 mm	230 VAC INPUT	11 W	38°	2700 K CRI>90	1085 LM	E A I G	L C	SDCM3	
1005557	quickspot white	68 mm	230 VAC INPUT	11 W	38°	3000 K CRI>90	1125 LM	E A I G	L C	SDCM3	
1005560	quickspot black	68 mm	230 VAC INPUT	11 W	38°	3000 K CRI>90	1125 LM	E A I G	L C	SDCM3	
1005558	quickspot nickel	68 mm	230 VAC INPUT	11 W	38°	3000 K CRI>90	1125 LM	E A I G	L C	SDCM3	
1005559	quickspot chrome	68 mm	230 VAC INPUT	11 W	38°	3000 K CRI>90	1125 LM	E A I G	L C	SDCM3	
1005568	quickspot white	68 mm	230 VAC INPUT	11 W	38°	4000 K CRI>90	1170 LM	E A I G	L C	SDCM3	
1005566	quickspot nickel	68 mm	230 VAC INPUT	11 W	38°	4000 K CRI>90	1170 LM	E A I G	L C	SDCM3	
1005567	quickspot black	68 mm	230 VAC INPUT	11 W	38°	4000 K CRI>90	1170 LM	E A I G	L C	SDCM3	
1005565	quickspot chrome	68 mm	230 VAC INPUT	11 W	38°	4000 K CRI>90	1170 LM	E A I G	L C	SDCM3	

## TECHNICAL DATA



Storage temperature	-40 ... +85 °C
Max. surface temperature	65 °C
Shock rating	IK06
Protection type (IP)	IP20
Ambient temperature $t_a$	-20 ... +50 °C
Power	11 W
Input voltage	230 V~ 50Hz AC
Service life L80B10 (h) @ $t_a = 25^\circ\text{C}$	50000 h

 <p>quicklight  <small>www.quicklight.com</small>  <small>8887 9400</small></p>	<p>Do not plug light string directly into mains supply without any drivers. LED driver must be housed indoors. Use only with the supplied driver. This product has been tested and meets the latest safe class 3.</p>	<p>quickspot                  Maximalstrom: 250mA                  Leistung: 11W                  Farbtemperatur: 3000K</p>	<p>Abstrahlwinkel: 38°                  Lichtstrom: 1100lm                  CRI : &gt;90</p>
	<p>Do not remove this label.</p>	    	

**ELECTRICAL CONNECTION**



## ASSEMBLY INSTRUCTIONS

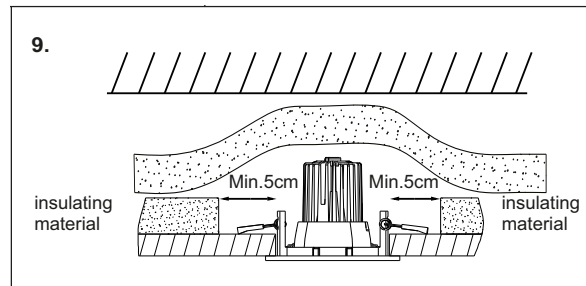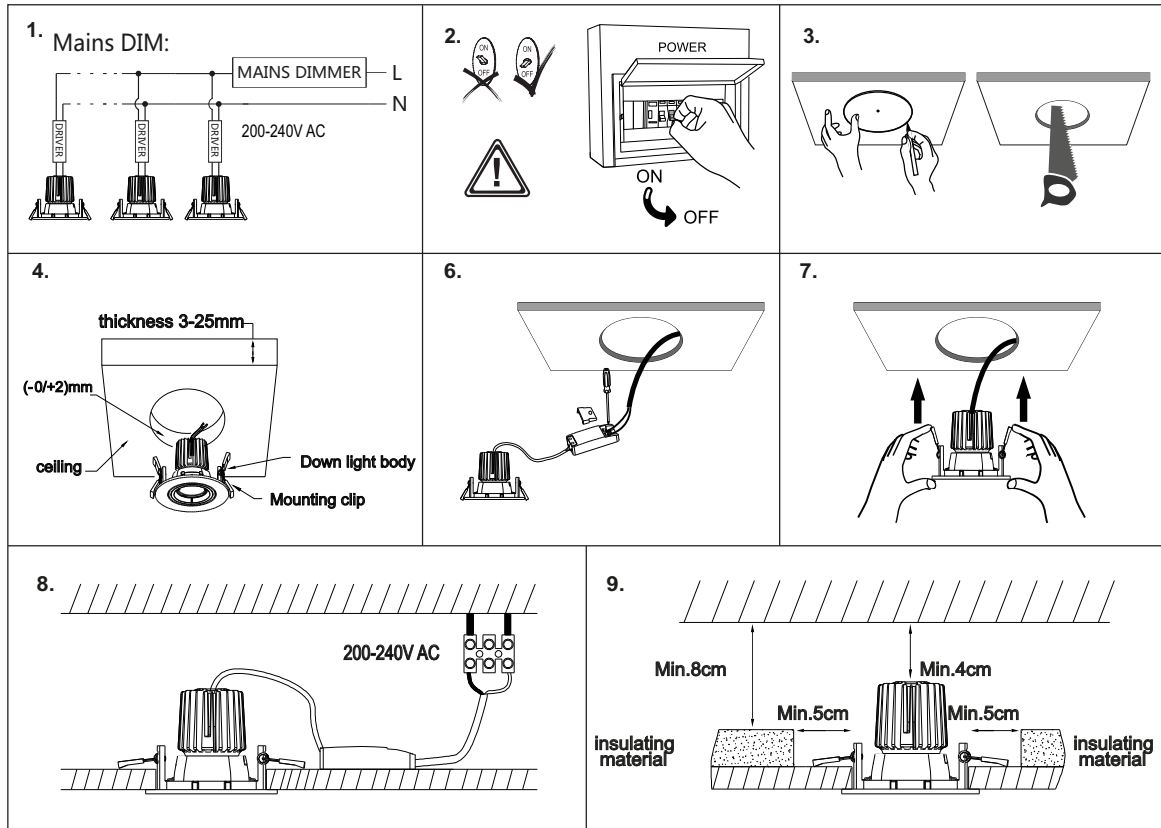

**WARNINGS**

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! Subject to technical changes! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!

**IP20**

Protected against ingress of solid foreign objects with a diameter of more than 12.5 mm.



Protection class II luminaires with double insulation

Luminaire must not be connected to earth

Supply cable must be double insulated and strain relief must be correctly installed.