

DATA SHEET


smartLED 8080

This high-quality LED strip light system offers a high degree of expandability and is made from anodised aluminium. The end caps are made from die-cast aluminium and have no visible screws. The control gear is integrated directly into the line and even long lengths can be set up quickly thanks to the easy-to-install through-wiring. The smartLED 8080 is also available in a surface-mounted or pendant version for effective use as a single luminaire. An indirect component can be optionally fitted. This LED line really knows how to impress with its ease of installation, wide range of applications and robust design.





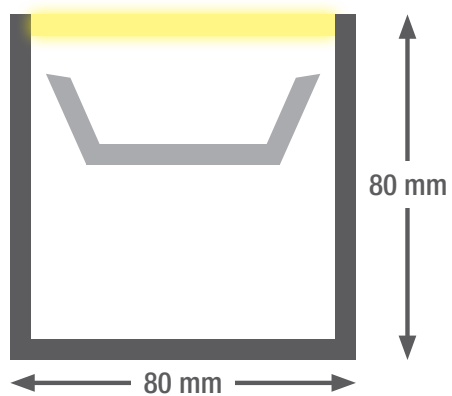

- Anodised aluminium channel
- With integrated control gear
- Opal PMMA or microprismatic cover
- Die-cast aluminium end caps, painted in profile colour, no visible screws
- Service life: 50 000 h LM-80 > 50 000 h
- Light colors: 2700 K / 3000 K / 4000 K / 6500 K
- Dimming option: DALI / 1–10V / Push Dim
- Optional: emergency lighting module with battery pack
- Optional: RAL or NCS powder coating
- Integrated through-wiring

LED SYSTEMS

1.361 smartLED 8080



Profile length up to 4.5 m one-piece, greater than 4.5 m multi-piece

ART. NO.	DESIGNATION	CHARACTERISTICS						
1004277	LED insert indirect ratio	230 VAC INPUT	25 W/M	2700 K CRI>80	133 LED/M	RELUXX		SDCM3
1004278	LED insert indirect ratio	230 VAC INPUT	13.5 W/M	2700 K CRI>80	133 LED/M	RELUXX		SDCM3
1004275	LED insert indirect ratio	230 VAC INPUT	25 W/M	3000 K CRI>80	133 LED/M	RELUXX		SDCM3
1004276	LED insert indirect ratio	230 VAC INPUT	13.5 W/M	3000 K CRI>80	133 LED/M	RELUXX		SDCM3
1004274	LED insert indirect ratio	230 VAC INPUT	25 W/M	4000 K CRI>80	133 LED/M	RELUXX		SDCM3
1004279	LED insert indirect ratio	230 VAC INPUT	13.5 W/M	4000 K CRI>80	133 LED/M	RELUXX		SDCM3

Accessories



Art. No.
1004156



Art. No.
1004224



Art. No.
1005380

ART. NO.	DESIGNATION
1004156	Mounting bracket
1004224	Profile connector 8080
1005380	Pendant set with mounting bracket 3m

Technical data


Storage temperature	-25 ... +50 °C
Max. surface temperature	75 °C
Shock rating	IK03
Protection type (IP)	IP20
Ambient temperature t_a	25 °C
Service life L80B10 (h) @ $t_a = 25^\circ\text{C}$	50000 h

1 kitchen ground floor **7** smartLED 1919 45° / 11W/m / 2700K / IP20 **8** 24V **9** 209583-01010100
5 Art. Nr.: 1000881 **6** Länge: 2800 mm **2** 1/2 **10** smaterion ag, Zeughausstrasse 10, 8887 Mels
4 CE **3** Länge tot: 11000 mm


- 1** Position, e.g. kitchen
- 2** Profile part for multi-part lengths, e.g. $\frac{1}{3}$, $\frac{2}{3}$, $\frac{3}{3}$
- 3** Length profile
- 4** Item number
- 5** Profile type, e.g. smartLED 1216
- 6** Voltage, e.g. 24 V
- 7** Power, e.g. 23W/m
- 8** Color temperature, e.g. 3000K
- 9** IP protection, e.g. IP20
- 10** Manufacturer address
- 11** QR code with unique identification ID

Electrical connection


DALI

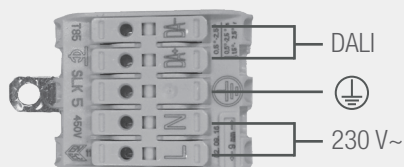

ON/OFF

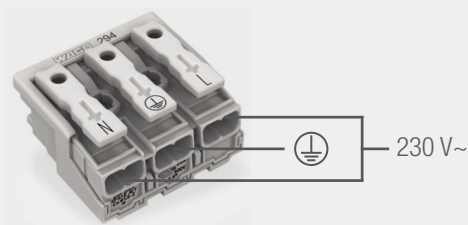


PUSH DIM

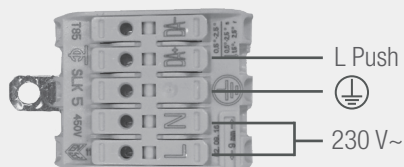


IP67 Option



Dimensions

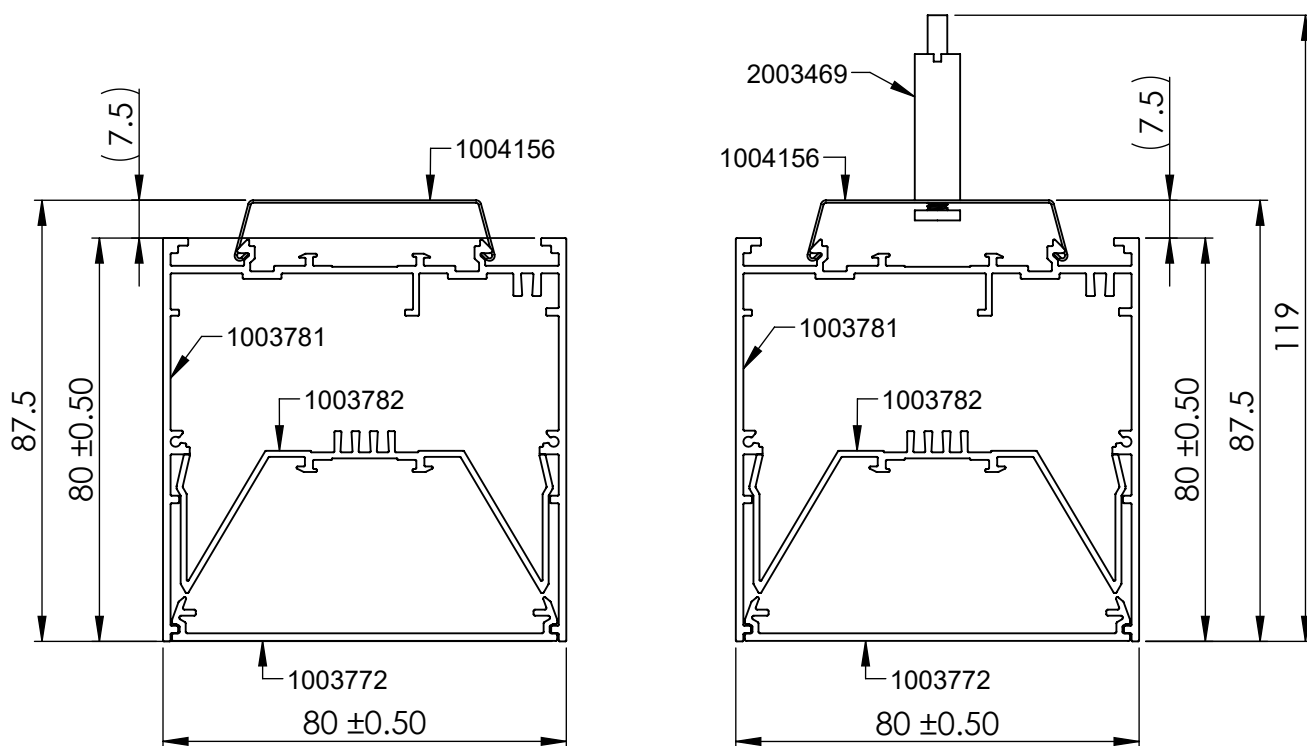

Assembly instructions

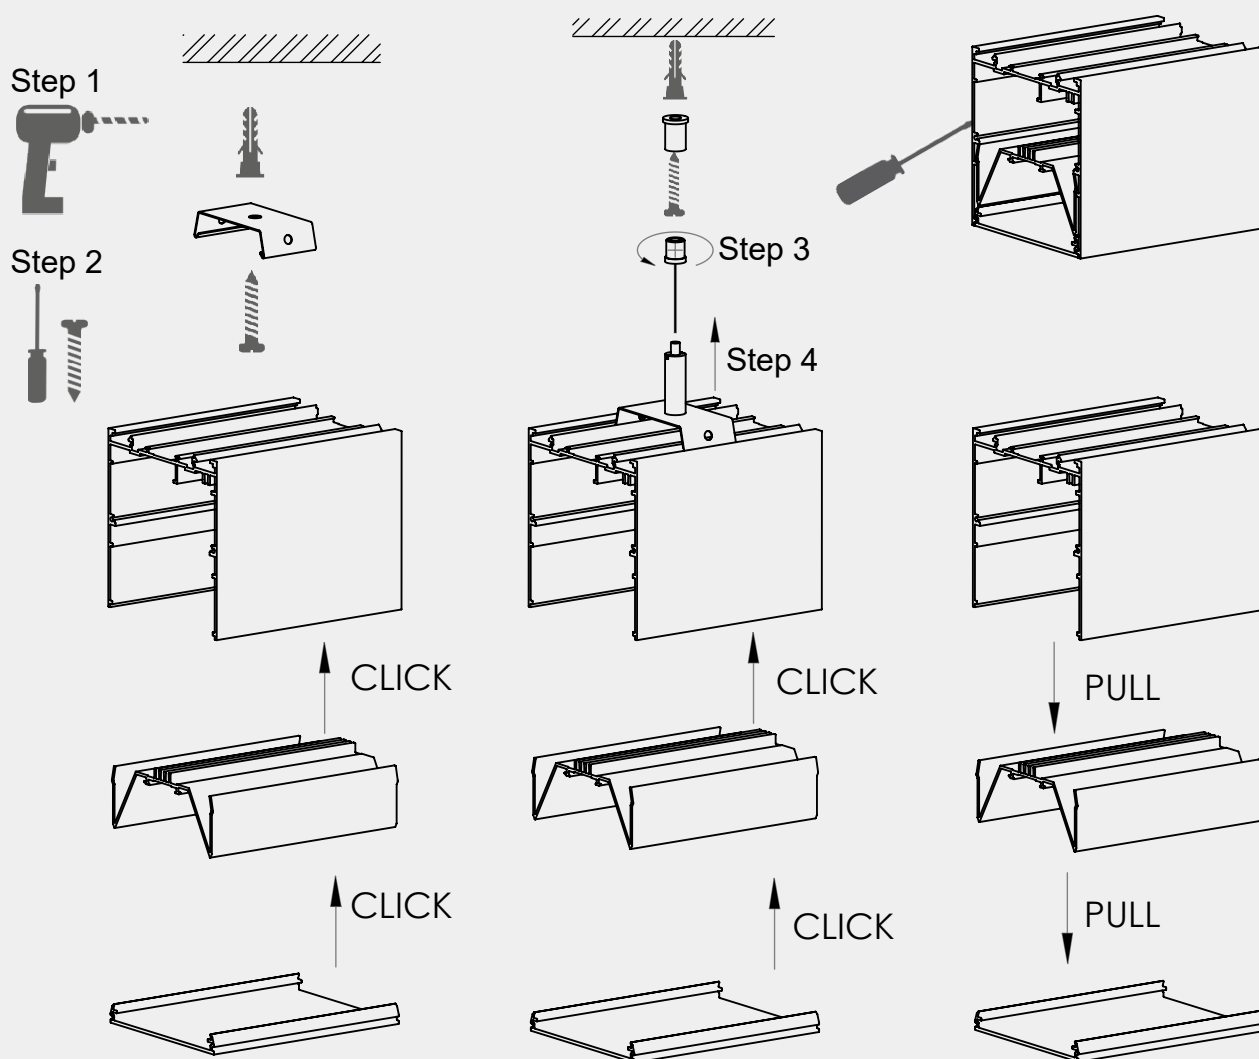


ATTENTION: Please make sure that no wires are pinched between the LED insert and the outer profile, so that the LED insert can snap in properly.

Cleaning and care

Wipe the luminaire clean using a damp, lint-free cloth. Do not scrub! If heavily soiled, wipe clean with a mild solution of warm soapy water (microfibre cloth and washing-up liquid). Do not use a scouring agent. Do not rub the luminaire dry, as the resulting static may damage the electronic components beyond repair.

Warnings

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!



DISPOSAL

The packaging must be recycled via the DSD (Green Dot) scheme or its equivalent. Dispose of the packaging correctly sorted. Waste electrical and electronic equipment must never be disposed of together with household waste. In accordance with the EU directives, the device must be disposed of in an orderly manner at the end of its service life. This means having the materials contained in the device recycled to avoid polluting the environment. Take the waste equipment to a collection point for electrical and electronic waste or to a recycling depot. For further information, please contact your local waste disposal service or your local authority.



The LED board(s) can only be replaced by smarterion as the manufacturer. Please do not attempt to replace the components yourself, as this will void the warranty and CE conformity.



The power supply can only be replaced by smarterion as the manufacturer. Please do not attempt to replace the components yourself, as this will void the warranty and CE conformity.

IP20

Protected against ingress of solid foreign objects with a diameter of more than 12.5 mm.



Class I luminaires with earth connector. It is absolutely essential to earth the luminaire housing.