



*quick***light**

QUICKSPOT 9W DALI

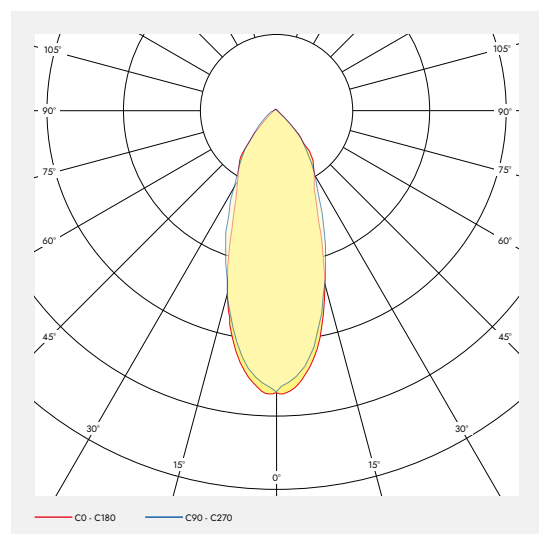
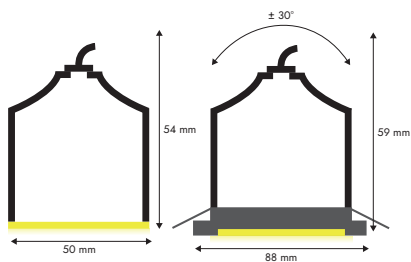
DATA SHEET






































































The quickspot series is extremely easy to install and offers a wide variety of combination options with different light and housing colors.

- High colour rendering index of CRI >90
- Light colors: 2700K / 3000K / 4000K
- Service life: 50,000 h LM-80
- Four different housing colors

quicklight


QUICKSPOT 9W DALI



ART. NO.	DESIGNATION	CHARACTERISTICS															
1006209	without frame		230 VAC INPUT		9 W		38°		2700 K CRI>90		700 LM		DALI CONTROL		SDCM3		
1006210	without frame		230 VAC INPUT		9 W		38°		3000 K CRI>90		750 LM		DALI CONTROL		SDCM3		
1006198	quickspot chrom		68 mm		230 VAC INPUT		9 W		38°		2700 K CRI>90		700 LM		DALI CONTROL		SDCM3
1006197	quickspot nickel		68 mm		230 VAC INPUT		9 W		38°		2700 K CRI>90		700 LM		DALI CONTROL		SDCM3
1006199	quickspot black		68 mm		230 VAC INPUT		9 W		38°		2700 K CRI>90		700 LM		DALI CONTROL		SDCM3
1006200	quickspot white		68 mm		230 VAC INPUT		9 W		38°		2700 K CRI>90		700 LM		DALI CONTROL		SDCM3
1006204	quickspot white		68 mm		230 VAC INPUT		9 W		38°		3000 K CRI>90		750 LM		DALI CONTROL		SDCM3
1006203	quickspot black		68 mm		230 VAC INPUT		9 W		38°		3000 K CRI>90		750 LM		DALI CONTROL		SDCM3
1006202	quickspot nickel		68 mm		230 VAC INPUT		9 W		38°		3000 K CRI>90		750 LM		DALI CONTROL		SDCM3
1006201	quickspot chrom		68 mm		230 VAC INPUT		9 W		38°		3000 K CRI>90		750 LM		DALI CONTROL		SDCM3

TECHNICAL DATA

Storage temperature	-40 ... +85 °C
Max. surface temperature	65 °C
Shock rating	IK06
Protection type (IP)	IP20
Ambient temperature ta	-20 ... +50 °C
Power	9 W
Input voltage	230 V~ 50Hz AC
Service life L80B10 (h) @ ta = 25°C	50000 h








Do not plug light string directly into mains supply without any drivers. LED driver must be housed indoors. Use only with the supplied driver. This product has been tested and meets the latest safe class 3.

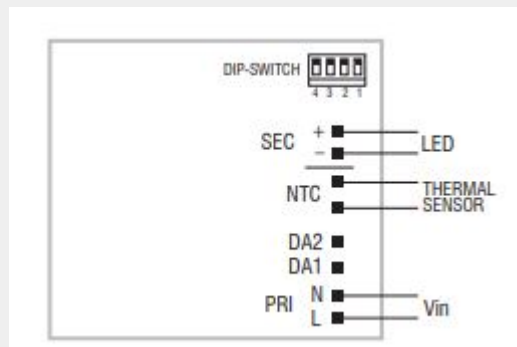
Do not remove this label.

quickspot
Maximalstrom: 200mA
Leistung: 9W
Farbtemperatur: 3000K

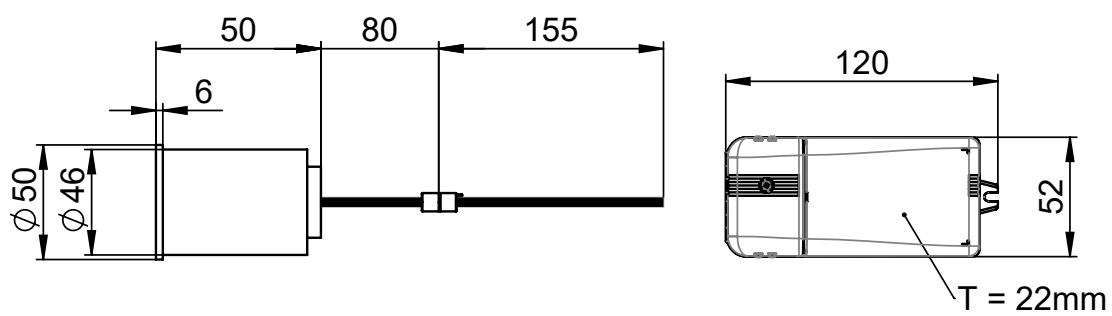
Abstrahlwinkel: 38°
Lichtstrom: 750lm
CRI: >90

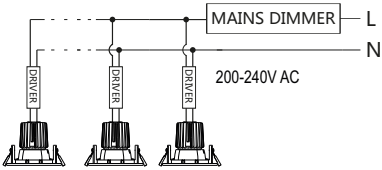
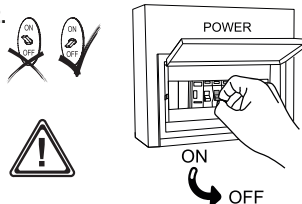
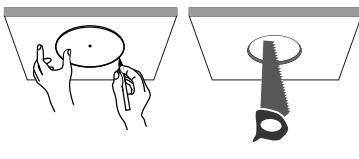
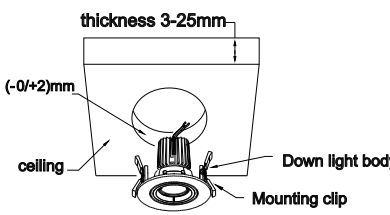
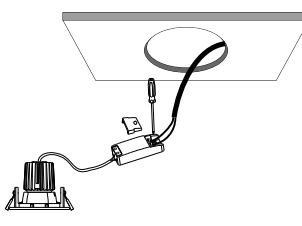

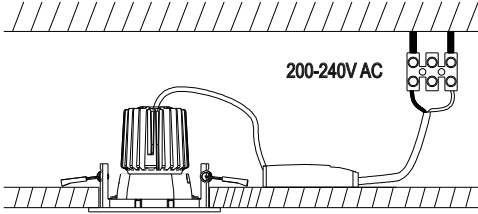
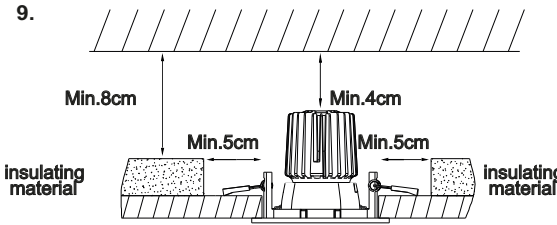
ELECTRICAL CONNECTION



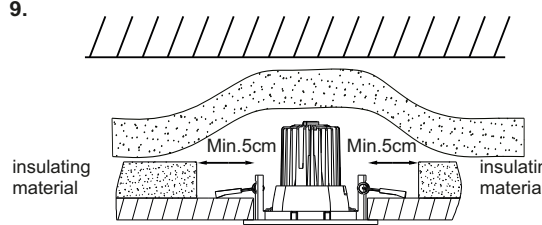
DIMENSIONS



ASSEMBLY INSTRUCTIONS

<p>1. Mains DIM:</p> 	<p>2.</p> 	<p>3.</p> 
<p>4.</p> 	<p>6.</p> 	<p>7.</p> 
<p>8.</p> 	<p>9.</p> 	

9.



WARNINGS

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! Subject to technical changes! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!

IP20

Protected against ingress of solid foreign objects with a diameter of more than 12.5 mm.



Protection class II luminaires with double insulation

Luminaire must not be connected to earth

Supply cable must be double insulated and strain relief must be correctly installed.