



DATA SHEET

smartTUBE W-80

The 360° distribution provides uniform light and is therefore ideal for prestigious rooms such as entrance halls, staircases and cultural centres, or simply for attractive offices and modern living rooms. The version in staircases enables several smartTUBEs to be connected.

- With integrated control gear
- Cover made of opal PMMA for absolutely homogeneous illumination
- Compact dimensions
- Made in Switzerland
- Other sizes available on request

6.73 smartTUBE W-80

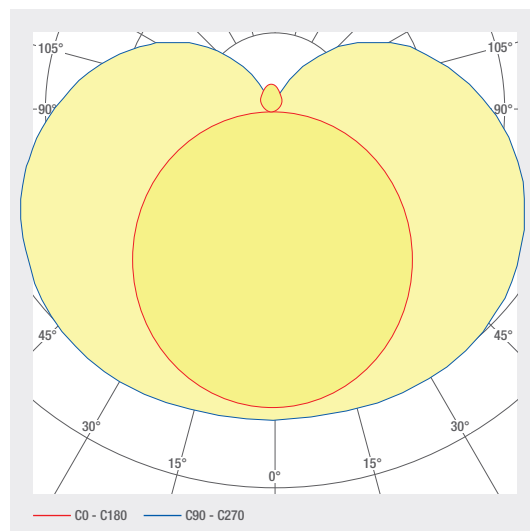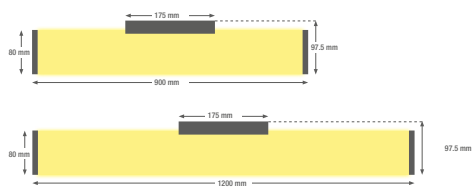

ART. NO.	DESIGNATION	CHARACTERISTICS							
1005266	smartTUBE W-80 wall light - 900	230 VAC INPUT	53 W	DIFFUSED BEAM	3000 K CRI>80	6240 LM	DALI CONTROL	PUSH CONTROL	
1005267	smartTUBE W-80 wall light - 900	230 VAC INPUT	53 W	DIFFUSED BEAM	4000 K CRI>80	6680 LM	DALI CONTROL	PUSH CONTROL	
1005268	smartTUBE W-80 wall light - 1200	230 VAC INPUT	70 W	DIFFUSED BEAM	3000 K CRI>80	8330 LM	DALI CONTROL	PUSH CONTROL	
1005269	smartTUBE W-80 wall light - 1200	230 VAC INPUT	70 W	DIFFUSED BEAM	4000 K CRI>80	8900 LM	DALI CONTROL	PUSH CONTROL	

Technical data

Ambient temperature ta	25 °C
Service life L80B10 (h) @ ta = 25°C	50000 h

1

smartBULK 900

2

3000 K

3

90 CRI

4

230 V ~ 50Hz / 20,5 W / IP 20

5

6

7

Art. Nr. : 1000881

8

9

smaterion ag, Zeughausstrasse 10, 8887 Mels

209583-01010100

- 1

Product description
- 2

Color temperature, e.g. 3000K
- 3

Color rendering index, e.g. 90 CRI
- 4

Voltage, e.g. 230 V ~
- 5

Power, e.g. 20 W
- 6

IP protection, e.g. IP20

7

Item number

8


QR code with unique identification ID

9


Manufacturer address

Electrical connection


DALI

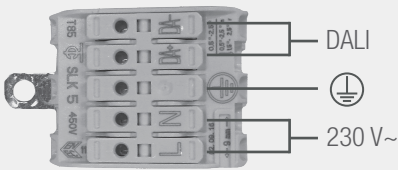

PUSH DIM (optional)

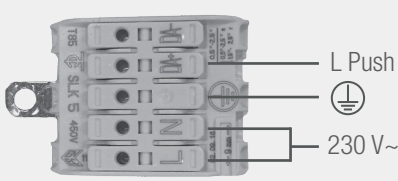

Dimensions

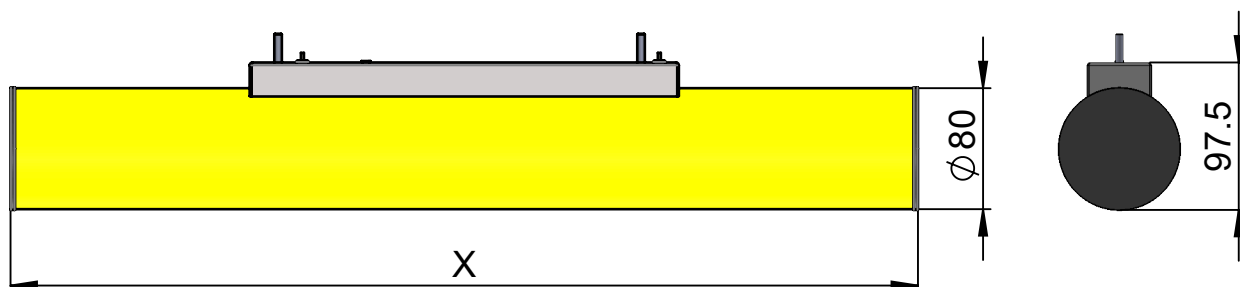

Warnings

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!



DISPOSAL

The packaging must be recycled via the DSD (Green Dot) scheme or its equivalent. Dispose of the packaging correctly sorted. Waste electrical and electronic equipment must never be disposed of together with household waste. In accordance with the EU directives, the device must be disposed of in an orderly manner at the end of its service life. This means having the materials contained in the device recycled to avoid polluting the environment. Take the waste equipment to a collection point for electrical and electronic waste or to a recycling depot. For further information, please contact your local waste disposal service or your local authority.



The LED board(s) can only be replaced by smarterion as the manufacturer. Please do not attempt to replace the components yourself, as this will void the warranty and CE conformity.



The power supply can only be replaced by smarterion as the manufacturer. Please do not attempt to replace the components yourself, as this will void the warranty and CE conformity.

**DALI
CONTROL**

The luminaire is dimmable by DALI. Please observe the DALI specifications. The DALI cable must meet the specification of a mains cable: 230V