



*quick***light**

QUICKSPOT 11W DALI



DATA SHEET









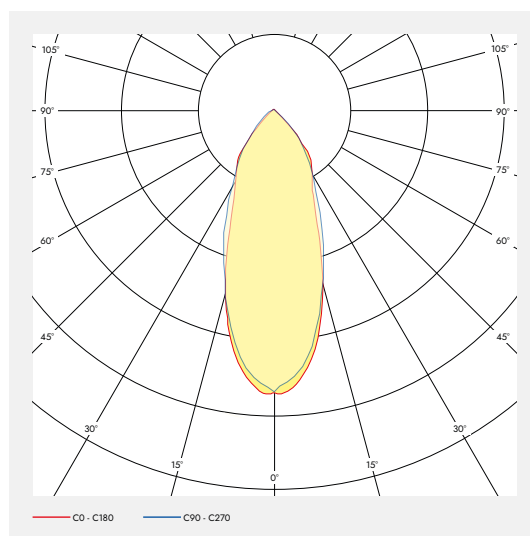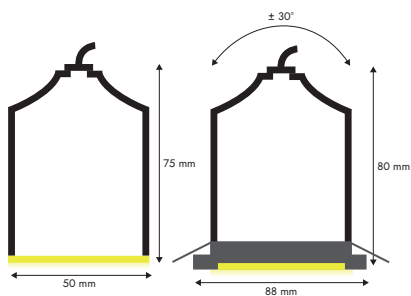




































The quickspot series is extremely easy to install and offers a wide variety of combination options with different light and housing colors.

- High colour rendering index of CRI >90
- Light colors: 2700K / 3000K / 4000K
- Service life: 50,000 h LM-80
- Four different housing colors


quicklight

QUICKSPOT 11W DALI





ART. NO.	DESIGNATION	CHARACTERISTICS									
1005593	quickspot without frame		11 W		2700 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3	
1005360	quickspot without frame		11 W		3000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3	
1005594	quickspot without frame		11 W		4000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3	
1005598	quickspot white		230 VAC INPUT	11 W		2700 K CRI>90	1085 LM		DALI CONTROL	250mA	SDCM3
1005595	quickspot chrome		230 VAC INPUT	11 W		2700 K CRI>90	1085 LM		DALI CONTROL	250mA	SDCM3
1005597	quickspot black		230 VAC INPUT	11 W		2700 K CRI>90	1085 LM		DALI CONTROL	250mA	SDCM3
1005596	quickspot nickel		230 VAC INPUT	11 W		2700 K CRI>90	1085 LM		DALI CONTROL	250mA	SDCM3
1005601	quickspot black		230 VAC INPUT	11 W		3000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3
1005602	quickspot white		230 VAC INPUT	11 W		3000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3
1005599	quickspot chrome		230 VAC INPUT	11 W		3000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3
1005600	quickspot nickel		230 VAC INPUT	11 W		3000 K CRI>90	1125 LM		DALI CONTROL	250mA	SDCM3
1005606	quickspot white		230 VAC INPUT	11 W		4000 K CRI>90	1170 LM		DALI CONTROL	250mA	SDCM3
1005604	quickspot nickel		230 VAC INPUT	11 W		4000 K CRI>90	1170 LM		DALI CONTROL	250mA	SDCM3
1005603	quickspot chrome		230 VAC INPUT	11 W		4000 K CRI>90	1170 LM		DALI CONTROL	250mA	SDCM3
1005605	quickspot black		230 VAC INPUT	11 W		4000 K CRI>90	1170 LM		DALI CONTROL	250mA	SDCM3

DIMENSIONS

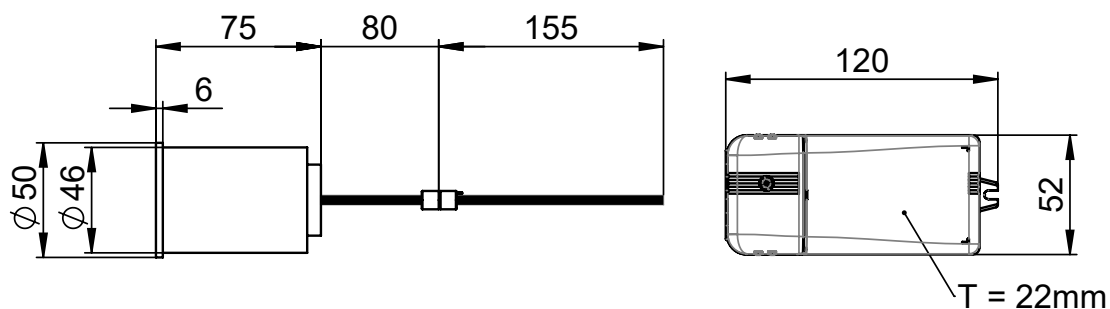

ASSEMBLY INSTRUCTIONS

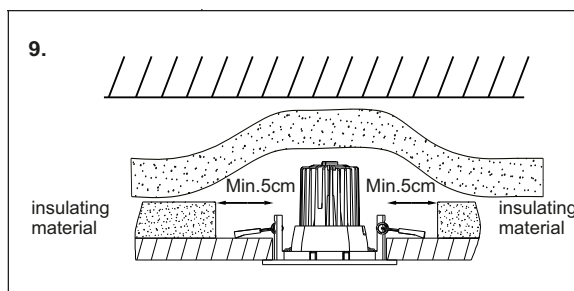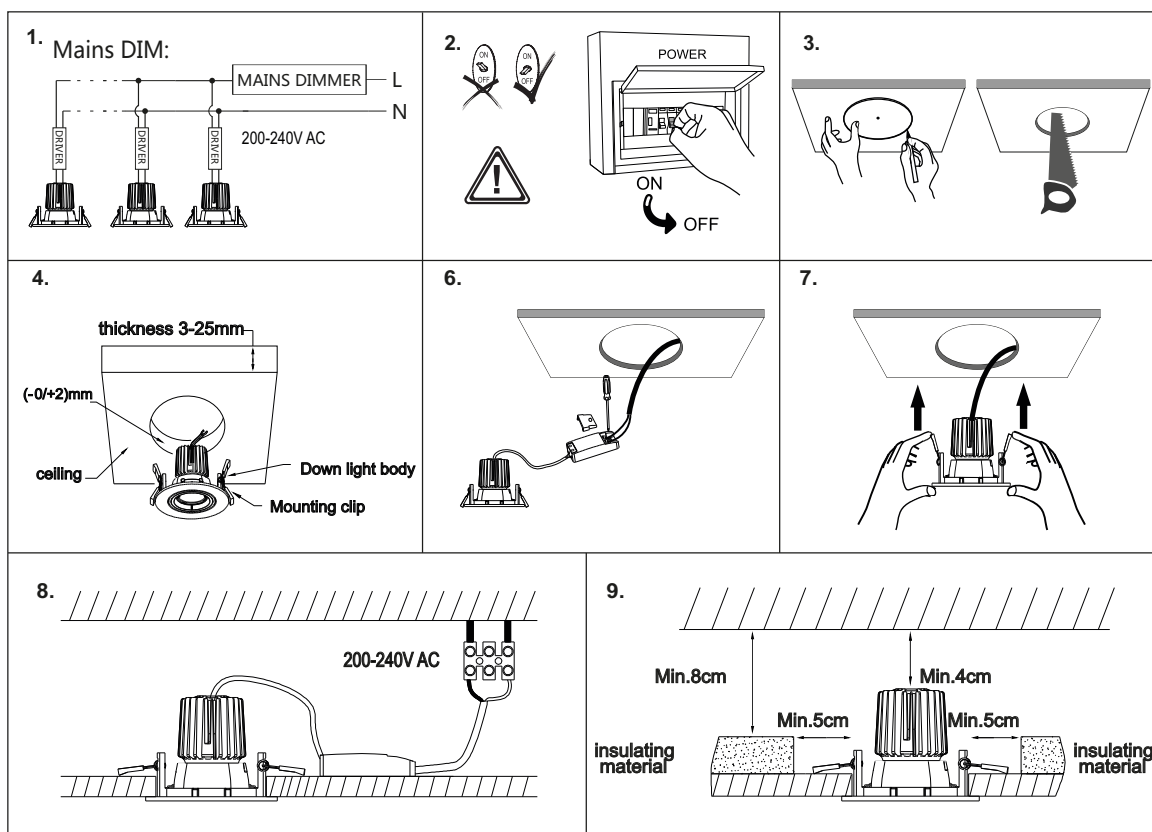

WARNINGS

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! Subject to technical changes! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!

IP20

Protected against ingress of solid foreign objects with a diameter of more than 12.5 mm.



Protection class II luminaires with double insulation

Luminaire must not be connected to earth

Supply cable must be double insulated and strain relief must be correctly installed.