



*quick***light**

QUICKSPOT 9W

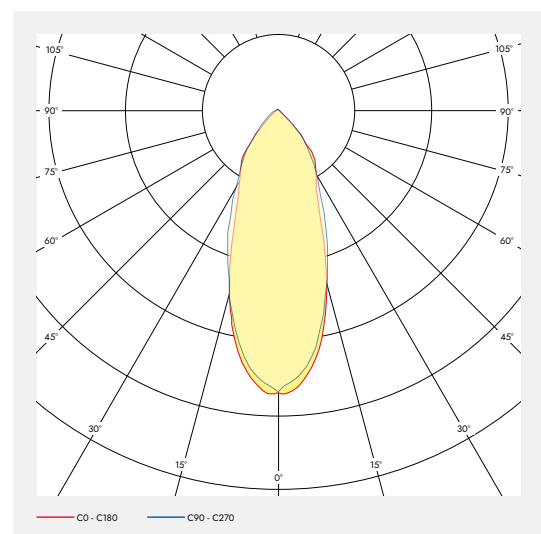
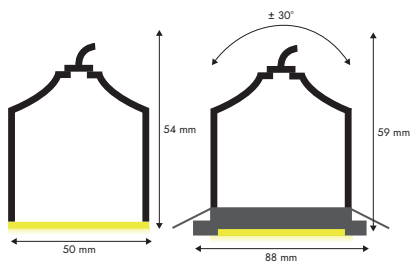
DATA SHEET


























The quickspot series is extremely easy to install and offers a wide variety of combination options with different light and housing colors.

- High colour rendering index of CRI >90
- Light colors: 2700K / 3000K / 4000K
- Service life: 50,000 h LM-80
- Four different housing colors
- Quick installation using prepared 3-way WAGO connection terminal block

quicklight

QUICKSPOT 9W



ART. NO.	DESIGNATION	CHARACTERISTICS								
1004957	without frame	 230 VAC INPUT	 9 W	 38°	 2700 K CRI>90	 700 LM	 D A G	 L C	 SDCM3	
1004958	without frame	 230 VAC INPUT	 9 W	 38°	 3000 K CRI>90	 750 LM	 D A G	 L C	 SDCM3	
1005746	quickspot chrome	 68 mm	 230 VAC INPUT	 9 W	 38°	 2700 K CRI>90	 700 LM	 D A G	 L C	 SDCM3
1005748	quickspot black	 68 mm	 230 VAC INPUT	 9 W	 38°	 2700 K CRI>90	 700 LM	 D A G	 L C	 SDCM3
1005747	quickspot nickel	 68 mm	 230 VAC INPUT	 9 W	 38°	 2700 K CRI>90	 700 LM	 D A G	 L C	 SDCM3
1005749	quickspot white	 68 mm	 230 VAC INPUT	 9 W	 38°	 2700 K CRI>90	 700 LM	 D A G	 L C	 SDCM3
1005745	quickspot black	 68 mm	 230 VAC INPUT	 9 W	 38°	 3000 K CRI>90	 750 LM	 D A G	 L C	 SDCM3
1005742	quickspot white	 68 mm	 230 VAC INPUT	 9 W	 38°	 3000 K CRI>90	 750 LM	 D A G	 L C	 SDCM3
1005743	quickspot nickel	 68 mm	 230 VAC INPUT	 9 W	 38°	 3000 K CRI>90	 750 LM	 D A G	 L C	 SDCM3
1005744	quickspot chrome	 68 mm	 230 VAC INPUT	 9 W	 38°	 3000 K CRI>90	 750 LM	 D A G	 L C	 SDCM3

TECHNICAL DATA

Storage temperature	-40 ... +85 °C
Max. surface temperature	65 °C
Shock rating	IK06
Protection type (IP)	IP20
Ambient temperature t_a	-20 ... +50 °C
Power	9 W
Input voltage	230 V~ 50Hz AC
Service life L80B10 (h) @ t_a = 25°C	50000 h





quicklight LED Leuchte • 1000mm • 10W • 840nm • 1000lm • 1000K • 10000h

Do not plug light string directly into mains supply without any drivers. LED driver must be housed indoors. Use only with the supplied driver. This product has been tested and meets the latest safe class 3.

Do not remove this label.

quickspot
 Maximalstrom: 200mA
 Leiste: 9W
 Farbtemperatur: 3000K

Abstrahlwinkel: 38°
 Lichtstrom: 750lm
 CRI : > 90

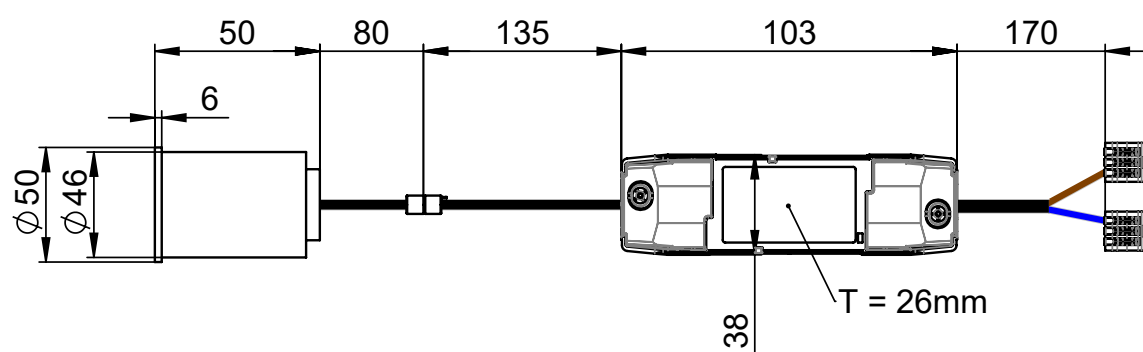
   

quicklight

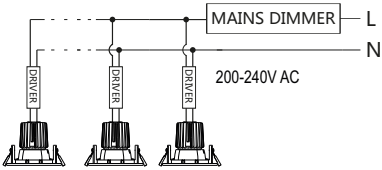
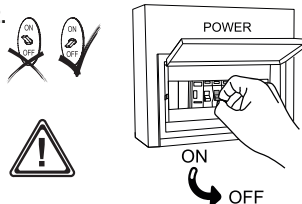
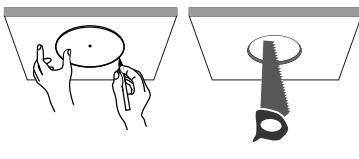
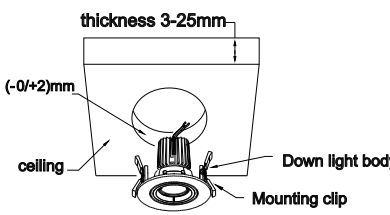
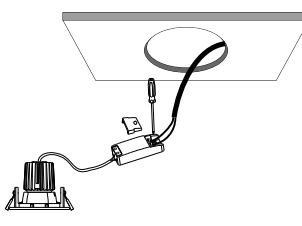

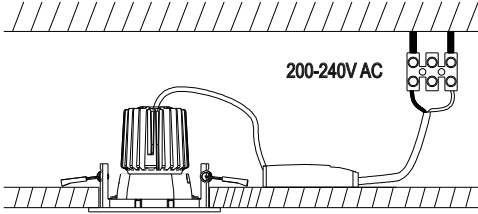
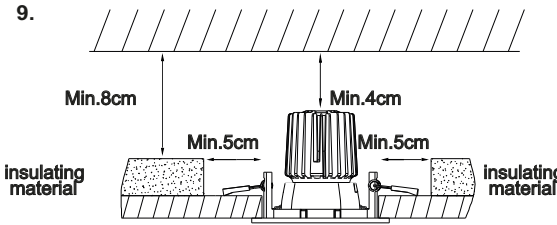
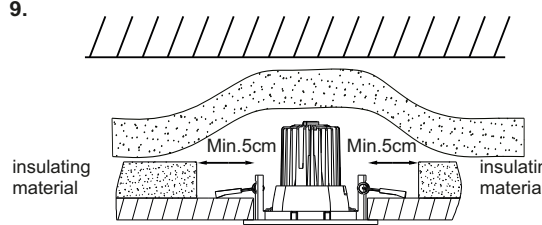
ELECTRICAL CONNECTION



DIMENSIONS



ASSEMBLY INSTRUCTIONS

<p>1. Mains DIM:</p> 	<p>2.</p> 	<p>3.</p> 
<p>4.</p> 	<p>6.</p> 	<p>7.</p> 
<p>8.</p> 	<p>9.</p> 	
<p>9.</p> 		

WARNINGS

The equipment may only be installed and put into service by authorised technical personnel (electrical fitters). The luminaire is designed solely for lighting applications and is to be installed according to the installation regulations. Any other form of use or installation is considered to be improper. Failure to comply with the installation instructions can damage the luminaire beyond repair. Return to the manufacturer if any defects are identified. The installation instructions must be retained for future reference. Subject to technical changes. Not to be installed on a wet or conductive substrate. The luminaire is only to be installed, put into service or modified in any way by authorised skilled personnel (a qualified electrician). National installation regulations must be observed. Before any work is performed on the luminaire, it must be disconnected from mains. Hot plug-in is not an option and may cause damage to the luminaire! The manufacturer is not liable for damage resulting from improper/faulty installation or operation, or from unauthorised modifications to the luminaire. The light source contained in this luminaire is only to be replaced by the manufacturer, a service technician authorised by the manufacturer or a similarly qualified person. Caution, risk of electric shock! Subject to technical changes! In the event of questions or queries, please contact the manufacturer.



Disconnect the luminaire from the power supply.



Caution, risk of electric shock!

IP20

Protected against ingress of solid foreign objects with a diameter of more than 12.5 mm.



Protection class II luminaires with double insulation

Luminaire must not be connected to earth

Supply cable must be double insulated and strain relief must be correctly installed.