



ISIS P2-4, ISIS L2-4, ISIS S2-4

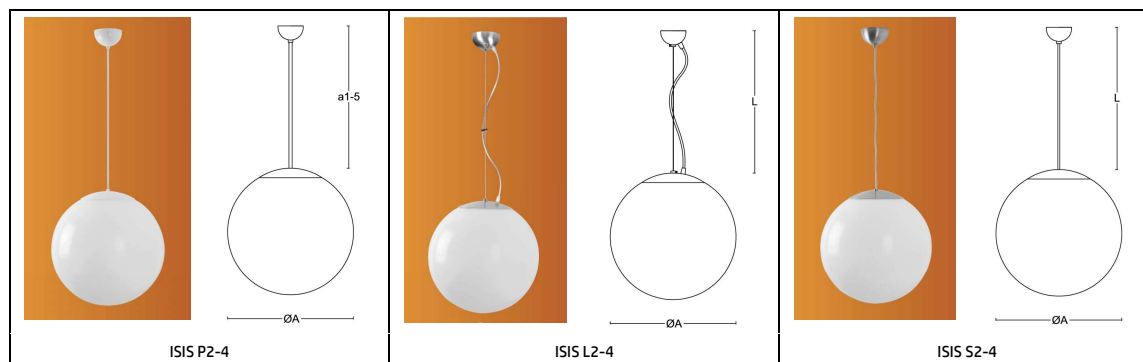

TECHNICAL DATA

Light source	LED module Osmont L06C, L07C	incandescent lamp	fluorescent lamp
Chromaticity temperatures	3000K, 4000K	-	-
CRI	3000K Ra>80, 4000K Ra>80	-	-
Ballast/LED driver	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP 40		
Hanger	ISIS P – pendant, metal or stainless steel with Ø 10mm ISIS L – wire, steel wire and transparent power cord ISIS S – cable, transparent or white cable		
Color	white (B), brass (MS), stainless polished (NL), stainless ground (NB)		
Shade	polyethylene PE		
Shade holder	steel holder with Ø110mm opening (for Ø300 mm size) steel holder with Ø150mm opening (for Ø400, 500 mm sizes)		

Type	ØA [mm]
ISIS P2,L2,S2	300
ISIS P3,L3,S3	400
ISIS P4,L4,S4	500

ISIS P		ISIS L		ISIS S	
Type	Length [mm]	Type	Length [mm]	Type	Length [mm]
a1	200	L100	1000	L100	1000
a2	400	L200	2000		
a3	600				
a4	800				
a5	1000				

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility	Warranty [yrs]*
			3000K	4000K	3000K	4000K	DIM (DALI)	
ISIS P2	LED-SL06C04Z11/PE2/a. x.000	22	2970	3130	2610	2760	•	5
ISIS L2	LED-SL06C04ZL11/PE2/L... x.000							
ISIS S2	LED-SL06C04ZS11/PE2/L100 x.000							
ISIS P3	LED-SL06C06Z11/PE3/a. x.000	29	3900	4110	3430	3620	•	5
ISIS L3	LED-SL06C06ZL11/PE3/L... x.000							
ISIS S3	LED-SL06C06ZS11/PE3/L100 x.000							
ISIS P4	LED-SL07C09Z11/PE4/a. x.000	44	5880	6200	5170	5450	•	5
ISIS L4	LED-SL07C09ZL11/PE4/L... x.000							
ISIS S4	LED-SL07C09ZS11/PE4/L100 x.000							

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K	4000K	[%]	[lm]			
ISIS P4	LED-SL07C09Z11/PE4/NK1W/a. x.000	44	5880	6200	5170	5450	2	150	3	NiCd 3,6V/1,6Ah	5
ISIS L4	LED-SL07C09ZL11/PE4/NK1W/L... x.000										
ISIS S4	LED-SL07C09ZS11/PE4/NK1W/L100 x.000										

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility DIM (DALI)
ISIS P2	Z11/PE2/a. x	40	E27	-	-
	E-25Z11/PE2/a. x	2x18	2xG24q2	TC-DEL	-
ISIS L2	ZL11/PE2/L... x	40	E27	-	-
	E-25ZL11/PE2/L... x	2x18	2xG24q2	TC-DEL	-
ISIS S2	ZS11/PE2/L100 x	40	E27	-	-
	E-25ZS11/PE2/L100 x	2x18	2xG24q2	TC-DEL	-
ISIS P3	Z11/PE3/a. x	75	E27	-	-
	E-26Z11/PE3/a. x	2x26	2xG24q3	TC-DEL	•
	E-28Z11/PE3/a. x	2x42	2xGX24q4	TC-TEL	-
ISIS L3	ZL11/PE3/L... x	75	E27	-	-
	E-26ZL11/PE3/L... x	2x26	2xG24q3	TC-DEL	•
	E-28ZL11/PE3/L... x	2x42	2xGX24q4	TC-TEL	-
ISIS S3	ZS11/PE3/L100 x	75	E27	-	-
	E-26ZS11/PE3/L100 x	2x26	2xG24q3	TC-DEL	•
	E-28ZS11/PE3/L100 x	2x42	2xGX24q4	TC-TEL	-
ISIS P4	Z11/PE4/a. x	100	E27	-	-
	E-26Z11/PE4/a. x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46Z11/PE4/a. x	4x26	4xG24q3	TC-DEL	•
ISIS L4	ZL11/PE4/L... x	100	E27	-	-
	E-26ZL11/PE4/L... x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46ZL11/PE4/L... x	4x26	4xG24q3	TC-DEL	•
ISIS S4	ZS11/PE4/L100 x	100	E27	-	-
	E-26ZS11/PE4/L100 x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46ZS11/PE4/L100 x	4x26	4xG24q3	TC-DEL	•

STANDARD emergency combined:

	Type	Input [W]	Socket	Type of lamp	T [hrs]	Type of battery	Light flux in emergency mode [%]
ISIS P3	NKC-226Z11/13/PE3/a. x	2x26	2xG24q3	TC-DEL	1	Ni-Cd 3,6V/1,6Ah	6,5
ISIS L3	NKC-226ZL11/13/PE3/L... x						
ISIS S3	NKC-226ZS11/13/PE3/L100 x						
ISIS P4	NKC-232Z11/16/PE4/a. x	2x32	2xGX24q3	TC-TEL	1	Ni-Cd 3,6V/1,6Ah	9
ISIS L4	NKC-232ZL11/16/PE4/L... x						
ISIS S4	NKC-232ZS11/16/PE4/L100 x						

x – color (B – white, MS – brass, NL – stainless polished, NB – stainless ground)

.000 – 3000K or 4000K

* – warranty on LED modules and power sources