



AURA 6,7,8,10,11



TECHNICAL DATA

Light source	LED module Osmont L11B, L12B, L12C, L14B, L14C, L15B, L15C, L18C	incandescent lamp	fluorescent lamp
Chromaticity temperature	3000K, 4000K	by source	by source
CRI	3000K Ra>80, 4000K Ra>80	by source	by source
Power source	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP44		
Fixture	metal		
Color of fixture	white		
Shade	three-layer glass with matt surface		
Shade attachment	with bayonet		
Mounting	wall, ceiling		
Applications	housing constructions (rooms, corridors), cultural premises		

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility				Warranty [yrs]*
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)	2 circuits	
AURA 6	LED-1L11B07BT11/011.000	8	1010	970	630	660	-	-	-	-	5
AURA 7	LED-1L12C03BT12/012.000	9	1080	1140	700	740	*	*	-	-	5
	LED-1L12B07BT12/012.000	11	1290	1350	840	880	*	*	-	-	5
AURA 8	LED-1L18C02BT13/013.000	11	1450	1530	940	990	*	*	*	-	5
	LED-1L18C03BT13/013.000	15	1950	2050	1260	1320	*	*	*	-	5
AURA 10	LED-1L14C03BT14/014.000	15	2000	2110	1300	1370	*	*	*	-	5
	LED-1L14B07BT14/014.000	20	2590	2700	1680	1760	*	*	*	-	5
AURA 11	LED-1L15C07BT15/015.000	21	2770	2920	1800	1900	*	*	*	-	5
	LED-1L15B07BT15/015.000	29	3880	4050	2520	2630	*	*	*	*	5

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K	4000K	[%]	[lm]			
AURA 6	LED-NZ1W/011 4000	1	-	170	-	110	100	170	1	Ni-Cd (2,4V/1,5Ah)	5
AURA 7	LED-NZ1W/012 4000	1	-	150	-	100	100	150	3	Ni-Cd (3,6V/1,6Ah)	5
AURA 8	LED-1L18C02BT13/013/NK1W.000	11	1450	1530	940	990	10	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L18C03BT13/013/NK1W.000	15	1950	2050	1260	1320	8	150	3	Ni-Cd (3,6V/1,6Ah)	5
AURA 10	LED-1L14C03BT14/014/NK1W.000	15	2000	2110	1300	1370	7	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L14B07BT14/014/NK1W.000	20	2590	2700	1680	1760	6	150	3	Ni-Cd (3,6V/1,6Ah)	5
AURA 11	LED-1L15C07BT15/015/NK1W.000	21	2770	2920	1800	1900	5	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L15B07BT15/015/NK1W.000	29	3880	4050	2520	2630	4	150	3	Ni-Cd (3,6V/1,6Ah)	5

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility Sensor (HF)
AURA 6	IN-12BT11/011	60	E27	-	-
AURA 7	IN-12BT12/012	75	E27	-	-
	E-14BT12/012	13	G24q1	TC-DEL	-
	E-15BT12/012	18	G24q2	TC-DEL	-
AURA 8	IN-12BT13/013	100	E27	-	• (1x60W)
	IN-22BT13/013	2x60	2xE27	-	-
	E-16BT13/013	26	G24q3	TC-DEL	•
	E-25BT13/013	2x18	2xG24q2	TC-DEL	-
AURA 10	IN-12BT14/014	100	E27	-	• (1x75W)
	IN-22BT14/014	2x75	2xE27	-	-
	E-25BT14/014	2x18	2xG24q2	TC-DEL	-
	E-26BT14/014	2x26	2xG24q3	TC-DEL	-
AURA 11	IN-22BT15/015	2x75	2xE27	-	• (2x60W)
	E-26BT15/015	2x26	2xG24q3	TC-DEL	-
	E-26BT15/015 32W	2x32	2xGX24q3	TC-TEL	-


STANDARD emergency combined:

	Type	Input [W]	Socket	Type of lamp	T [hrs]	Type of battery	Light flux in emergency mode [%]
AURA 8	NK-E-18/T/013	18	G24q2	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	14
AURA 10	NKC-218/13/T/014	2x18	2xG24q2	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	9
	NKC-226/13/T/014	2x26	2xG24q3	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	6,5
AURA 11	NKC-226/13/T/015	2x26	2xG24q3	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	6,5

.000 – 3000K or 4000
* - warranty on LED modules and power sources

DIMENSIONS


DIMENSIONS OF LUMINAIRE [mm]:

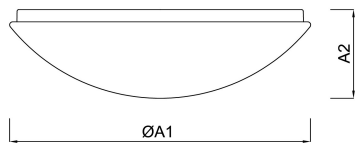

	ØA1	A2
AURA 6	200	105
AURA 7	250	110
AURA 8	300	115
AURA 10	360	125
AURA 11	420	125

MOUNTING DIMENSIONS [mm]:

AURA 6		
AURA 7		
AURA 8		

AURA 10	
AURA 11	