


## SYLVIA 1A,1



## TECHNICAL DATA

|                          |                                                             |                   |                  |
|--------------------------|-------------------------------------------------------------|-------------------|------------------|
| Light source             | LED module Osmont L28C, L25B                                | incandescent lamp | fluorescent lamp |
| Chromaticity temperature | 3000K, 4000K                                                | by source         | by source        |
| CRI                      | 3000K Ra>80, 4000K Ra>80                                    | by source         | by source        |
| Power source             | Tridonic                                                    | -                 | Tridonic         |
| Energy class             | A++                                                         | by source         | by source        |
| Input voltage            | 230V                                                        |                   |                  |
| IP                       | IP44                                                        |                   |                  |
| Fixture                  | metal                                                       |                   |                  |
| Color of fixture         | white                                                       |                   |                  |
| Class II                 | LED                                                         |                   |                  |
| Shade                    | three layers glass with matt surface                        |                   |                  |
| Shade attachment         | with folding holders                                        |                   |                  |
| Mounting                 | wall, ceiling                                               |                   |                  |
| Applications             | housing constructions (rooms, corridors), cultural premises |                   |                  |

## VARIANTS

LED:

|           | Type                   | Input [w] | Luminous flux LED [lm] |       | Luminous flux of luminaire [lm] |       | Warranty [yrs]* |
|-----------|------------------------|-----------|------------------------|-------|---------------------------------|-------|-----------------|
|           |                        |           | 3000K                  | 4000K | 3000K                           | 4000K |                 |
| SYLVIA 1A | LED-1L28C03U11/131.000 | 11        | 1380                   | 1460  | 900                             | 950   | 5               |
| SYLVIA 1  | LED-2L25B07U12/129.000 | 21        | 2590                   | 2700  | 1680                            | 1760  | 5               |

STANDARD:

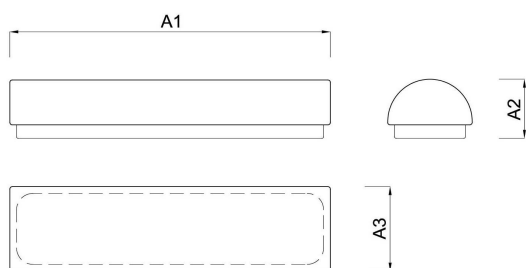
|           | Type         | Input [w] | Socket | Type of lamp |
|-----------|--------------|-----------|--------|--------------|
| SYLVIA 1A | IN-22U11/131 | 2x28      | 2xE14  | -            |
| SYLVIA 1  | IN-32U12/129 | 3x28      | 3xE14  | -            |
|           | E-16U12/129  | 24        | G5     | T5           |

.000 – 3000K or 4000

\* - warranty on LED modules and power sources

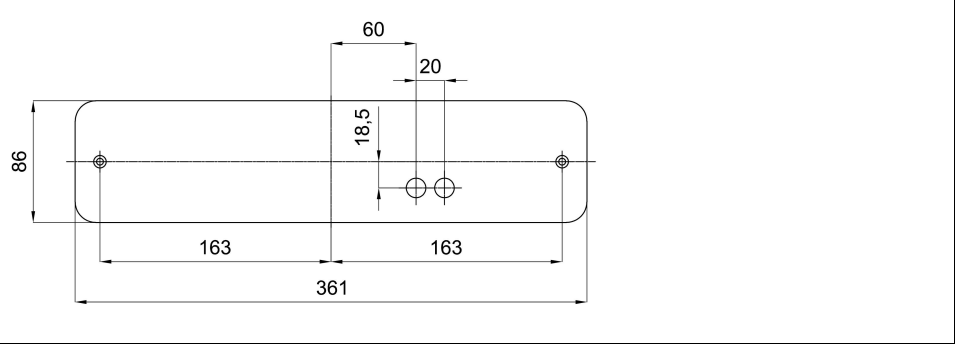
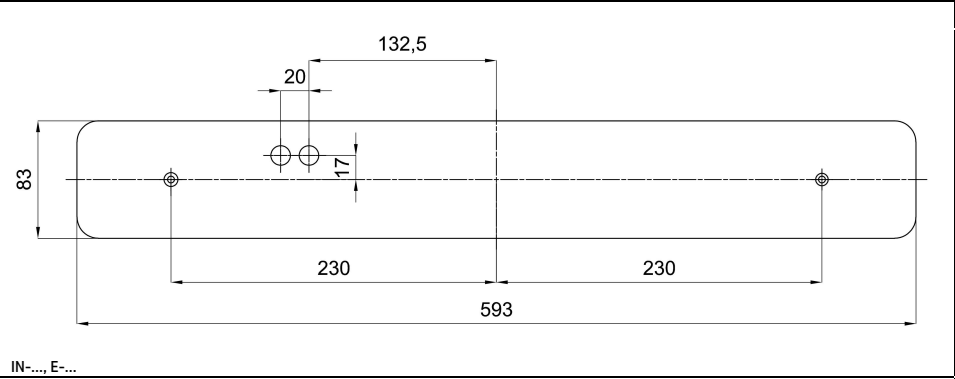
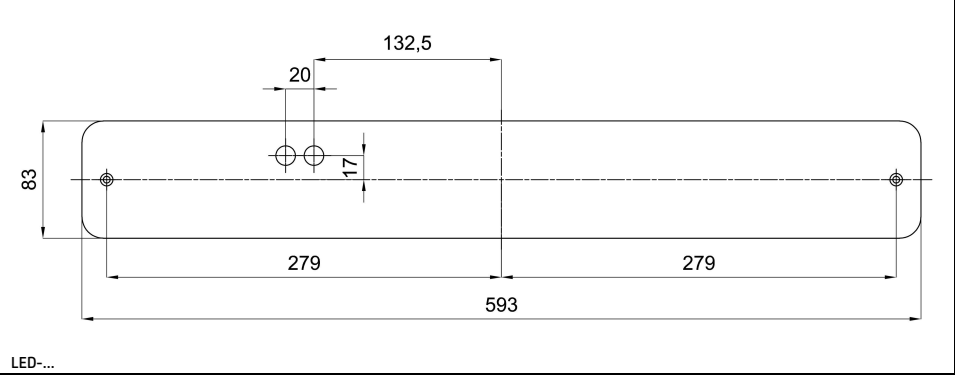
## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:



|           | A1  | A2 | A3  |
|-----------|-----|----|-----|
| SYLVIA 1A | 380 | 75 | 105 |
| SYLVIA 1  | 610 | 75 | 105 |

MOUNTING DIMENSIONS [mm]:

|           |                                                                                                     |
|-----------|-----------------------------------------------------------------------------------------------------|
| SYLVIA 1A |                   |
| SYLVIA 1  | IN-..., E-...<br> |
|           | LED-...<br>      |