



## LYRA 1,2



## TECHNICAL DATA

|                          |                                          |                   |                  |
|--------------------------|------------------------------------------|-------------------|------------------|
| Light source             | LED module Osmont L11B, L12B, L26B       | incandescent lamp | fluorescent lamp |
| Chromaticity temperature | 3000K, 4000K                             | by source         | by source        |
| CRI                      | 3000K Ra>80, 4000K Ra>80                 | by source         | by source        |
| Power source             | Tridonic                                 | -                 | -                |
| Energy class             | A++                                      | by source         | by source        |
| Input voltage            | 230V                                     |                   |                  |
| IP                       | IP43                                     |                   |                  |
| Fixture                  | metal                                    |                   |                  |
| Color of fixture         | white                                    |                   |                  |
| Shade                    | three layers glass with matt surface     |                   |                  |
| Shade attachment         | with folding holders                     |                   |                  |
| Mounting                 | wall                                     |                   |                  |
| Applications             | housing constructions (rooms, corridors) |                   |                  |

## VARIANTS

LED:

|        | Type                       | Input [W] | Luminous flux LED [lm] |       | Luminous flux of luminaire [lm] |       | Warranty [yrs]* |
|--------|----------------------------|-----------|------------------------|-------|---------------------------------|-------|-----------------|
|        |                            |           | 3000K                  | 4000K | 3000K                           | 4000K |                 |
| LYRA 1 | LED-2L26B07U4/245.000      | 15        | 1940                   | 2020  | 1280                            | 1330  | 5               |
| LYRA 2 | LED-2L11/1L12B07U6/265.000 | 25        | 3230                   | 3370  | 2330                            | 2430  | 5               |

STANDARD:

|        | Type        | Input [W] | Socket  | Type of lamp | Possibility |
|--------|-------------|-----------|---------|--------------|-------------|
|        |             |           |         |              | Sensor (HF) |
| LYRA 1 | IN-12U4/245 | 75        | E27     | -            | • (1x60W)   |
|        | E-16U4/245  | 26        | G24q3   | TC-DEL       | -           |
| LYRA 2 | IN-22U6/265 | 2x75      | 2xE27   | -            | • (1x75W)   |
|        | E-26U6/265  | 2x26      | 2xG24q3 | TC-DEL       | -           |

STANDARD emergency combined:


|        | Type           | Input [W] | Socket  | Type of lamp | T [hrs] | Type of battery  | Light flux in emergency mode [%] |
|--------|----------------|-----------|---------|--------------|---------|------------------|----------------------------------|
| LYRA 1 | NK-E-26/245    | 26        | G24q3   | TC-DEL       | 1       | Ni-Cd 3,6V/1,5Ah | 10                               |
| LYRA 2 | NKC-226/13/265 | 2x26      | 2xG24q3 | TC-DEL       | 1       | Ni-Cd 3,6V/1,5Ah | 8                                |

.000 – 3000K or 4000

\* – warranty on LED modules and power sources




## DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:

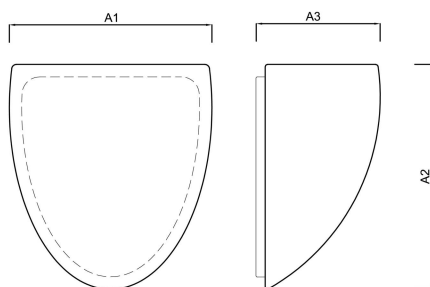

|        | A1  | A2  | A3  |
|--------|-----|-----|-----|
| LYRA 1 | 250 | 280 | 145 |
| LYRA 2 | 350 | 390 | 195 |

MOUNTING DIMENSIONS [mm]:
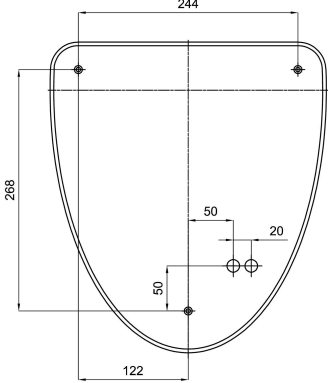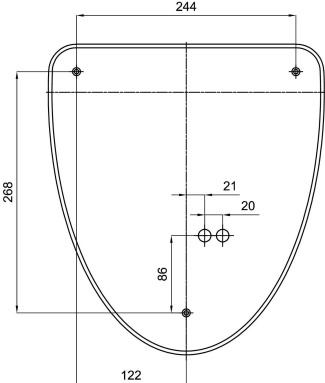
|        |                                                                                   |                                                                                    |
|--------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| LYRA 1 |  |                                                                                    |
| LYRA 2 |  |  |
|        | IN-..., E-..., LED-...                                                            | NKC-...                                                                            |