



DELIA L4, L5



TECHNICAL DATA

Light source	LED module Osmont L51B, L52B	incandescent lamp	fluorescent lamp
Chromaticity temperature	3000K, 4000K	by source	by source
CRI	3000K Ra>80, 4000K Ra>80	by source	by source
Power source	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP41		
Pendant	3 wire, length 1m		
Color	white		
Shade	opal polymethylmetacrylate (PM)		
Shade attachment	with folding holders		
Mounting	ceiling		
Applications	industrial and office premises, corridors		

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility				Warranty [yrs]*
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)	2 circuits	
DELIA L4	LED-6L51B07ZL11/PM25/L100.000	68	10210	10670	6940	7260	-	•	-	•	5
	LED-6L51B10ZL11/PM25/L100.000	94	14790	15450	10060	10510	-	•	-	•	5
DELIA L5	LED-9L52B07ZL11/PM26/L100.000	104	15310	16000	10720	11200	-	•	-	•	5
	LED-9L52B10ZL11/PM26/L100.000	165	22180	23170	15530	16220	-	•	-	•	5

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility
					DIM (DALI)
DELIA L4	IN-42ZL11/PM25/L100	4x40	4xE27	-	-
	E-47KZL11/PM25/L100	4x36	4x2G10	TC-F	•
DELIA L5	IN-62ZL11/PM26/L100	6x30	6xE27	-	-
	E-67ZL11/PM26/L100	6x36	6x2G10	TC-F	•

.000 - 3000K or 4000


* - warranty on LED modules and power sources

DIMENSIONS


DIMENSIONS OF LUMINAIRE [mm]:

MOUNTING DIMENSIONS OF WIRE PENDANT [mm]:

MOUNTING DIMENSIONS OF CEILING COVER [mm]:

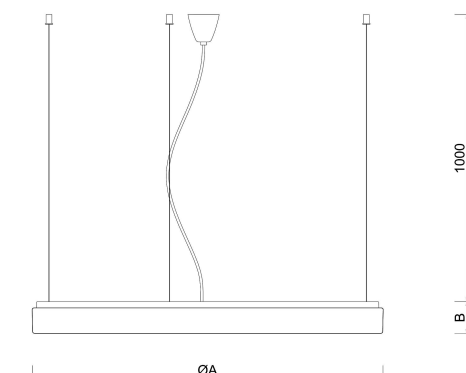

	ØA1	A2
DELIA L4	650	85
DELIA L5	900	90

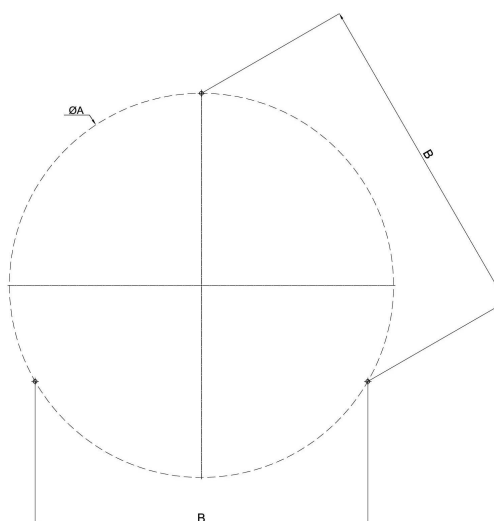

	ØA	B
DELIA L4	550	476
DELIA L5	780	675,5

