


GEMINI 1,2



TECHNICAL DATA

Light source	LED module Osmont L47B, L48B	incandescent lamp
Chromaticity temperature	3000K, 4000K	by source
CRI	3000K Ra>80, 4000K Ra>80	by source
Power source	Tridonic	-
Energy class	A++	by source
Input voltage	230V	
IP	IP43	
Fixture	metal	
Color of fixture	white	
Shade	three layers glass with matt surface	
Shade attachment	with folding holders	
Mounting	wall, ceiling	
Applications	housing constructions (rooms, corridors), cultural premises	

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility				Warranty [yrs]*
			3000K	4000K	3000K	4000K	Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)	2 circuits	
GEMINI 1	LED-1L47B07U47/207.000	20	2590	2700	1680	1760	*	*	-	*	5
GEMINI 2	LED-1L48B07U48/208.000	29	3880	4050	2600	2710	*	*	-	*	5

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K	4000K	[%]	[lm]			
GEMINI 1	LED-1L47B07U47/207/NK1W.000	20	2590	2700	1680	1760	6	150	3	Ni-Cd (3,6V/1,6Ah)	5
GEMINI 2	LED-1L48B07U48/208/NK1W.000	29	3880	4050	2600	2710	4	150	3	Ni-Cd (3,6V/1,6Ah)	5

STANDARD:


	Type	Input [W]	Socket	Possibility
				Sensor (HF)
GEMINI 1	IN-22U47/207	2x30	2xE27	• (1x40W)
GEMINI 2	IN-22U48/207	2x60	2xE27	• (1x60W)

.000 – 3000K or 4000K

* - warranty on LED modules and power sources


DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:



	A1	A2	A3
GEMINI 1	385	235	95
GEMINI 2	495	310	95

MOUNTING DIMENSIONS [mm]:

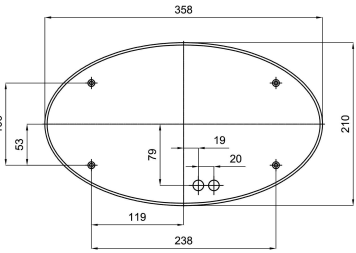CRATER 1	
CRATER 2	