


DELIA 1AA,1A,1,2,3,4,5



TECHNICAL DATA

Light source	LED module Osmont L10C, L12B, L12C, L14B, L14C, L16B, L16C, L53C, L51B, L52B	incandescent lamp	fluorescent lamp
Chromaticity temperature	3000K, 4000K	by source	by source
CRI	3000K Ra>80, 4000K Ra>80	by source	by source
Power source	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP44, IP54 (LED)		
Shock resistance	IK10 (shade PC)		
Fixture	metal		
Color of fixture	white		
Shade	opal polycarbonate (PC) or opal polymethylmetacrylate (PM)		
Shade attachment	with folding holders		
Mounting	wall, ceiling		
Applications	industrial premises, corridors, outdoor premises		

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Possibility				Warranty [yrs]*
			3000K	4000K	3000K		4000K		Sensor (HF)	DIM (DALI)	Corridor (DALI+HF)	2 circuits	
					PC	PM	PC	PM					
DELIA 1AA	LED-1L10C03KN22/PC20.000	5	620	650	460	-	480	-	-	-	-	-	5
	LED-1L12C03KN32/Px21.000	9	1080	1140	800	780	840	820	*	-	-	-	5
DELIA 1A	LED-1L12B07KN32/Px21.000	11	1290	1350	950	930	1000	970	*	-	-	-	5
	LED-1L14C03KN62/Px22.000	15	2000	2110	1480	1440	1560	1520	*	*	-	-	5
DELIA 1	LED-1L14B07KN62/Px22.000	20	2590	2700	1920	1860	2000	1940	*	*	-	-	5
	LED-1L16C07KN83/Px23.000	28	3690	3890	2580	2580	2720	2720	*	*	*	-	5
DELIA 2	LED-1L16B07KN83/Px23.000	36	4850	5070	3400	3400	3550	3550	*	*	*	*	5
	LED-3L53C07KN94/Px24.000	35	4750	5010	3140	3140	3310	3310	-	*	-	-	5
DELIA 3	LED-3L53C10KN94/Px24.000	53	6780	7150	4470	4470	4720	4720	-	*	-	-	5
	LED-6L51B07KN10/PM25.000	68	10210	10670	-	6940	-	7260	-	*	-	*	5
DELIA 4	LED-6L51B10KN10/PM25.000	94	14790	15450	-	10060	-	10510	-	*	-	*	5
	LED-9L52B07KN11/PM26.000	104	15310	16000	-	10720	-	11200	-	*	-	*	5
DELIA 5	LED-9L52B10KN11/PM26.000	165	22180	23170	-	15530	-	16220	-	*	-	*	5

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]				Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K		4000K		[%]	[lm]			
					PC	PM	PC	PM					
DELIA 1A	LED-NZ1W/Px21.000	1	-	150	-	-	110	-	100	150	3	Ni-Cd (3,6V/1,6Ah)	5
DELIA 1	LED-1L14C03KN62/Px22/NK1W.000	15	2000	2110	1480	1440	1560	1520	7	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L14B07KN62/Px22/NK1W.000	20	2590	2700	1920	1860	2000	1940	6	150	3	Ni-Cd (3,6V/1,6Ah)	5
DELIA 2	LED-1L16C07KN83/Px23/NK1W.000	28	3690	3890	2580	2580	2720	2720	4	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-1L16B07KN83/Px23/NK1W.000	36	4850	5070	3400	3400	3550	3550	3	150	3	Ni-Cd (3,6V/1,6Ah)	5
DELIA 3	LED-3L53C07KN94/Px24/NK1W.000	35	4750	5010	3140	3140	3310	3310	3	150	3	Ni-Cd (3,6V/1,6Ah)	5
	LED-3L53C10KN94/Px24/NK1W.000	53	6780	7150	4470	4470	4720	4720	2	150	3	Ni-Cd (3,6V/1,6Ah)	5

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility
					Sensor (HF)
DELIA 1A	IN-12KN32/PC21	40	E27	-	• (1x30W)
	IN-12KN32/PM21	30	E27	-	• (1x20W)
DELIA 1	IN-12KN62/PC22	40	E27	-	• (1x30W)
	IN-12KN62/PM22	30	E27	-	• (1x20W)
	E-16KN62/Px22	26	G24q3	TC-DEL	-
	E-25KN62/Px22	2x18	2xG24q2	TC-DEL	-
DELIA 2	IN-22KN83/PC23	2x40	2xE27	-	• (2x30W)
	IN-22KN83/PM23	2x30	2xE27	-	• (2x20W)
	E-26KN83/Px08	2x26	2xG24q3	TC-DEL	-
DELIA 3	IN-32KN94/PC24	3x40	3xE27	-	• (3x30W)
	IN-32KN94/PM24	3x30	3xE27	-	• (3x20W)
	E-26KN94/Px24 32W	2x32	2xGX24q3	TC-TEL	-
DELIA 4	E-27KN94/Px24	2x36	2xG10	TC-F	-
	IN-42KN10/PM25	4x30	4xE27	-	-
	E-47KN10/PM25	4x36	4xG10	TC-F	-
DELIA 5	IN-62KN11/PM26	6x30	6xE27	-	-
	E-66KN11/PM26	6x24	6xG5	T5	-
	E-67KN11/PM26	6x36	6xG10	TC-F	-


STANDARD emergency combined:

	Type	Input [W]	Socket	Type of lamp	T [hrs]	Type of battery	Light flux in emergency mode [%]
DELIA 1	NK-E-26/Px22	26	G24q3	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	10
DELIA 2	NKC-226/13/Px23	2x26	2xG24q3	TC-DEL	1	Ni-Cd (3,6V/1,6Ah)	6,5
DELIA 3	NKC-232/16/Px24	2x32	2xGX24q3	TC-TEL	1	Ni-Cd (3,6V/1,6Ah)	9


Px – shade PC or PM
.000 – 3000K or 4000
* - warranty on LED modules and power sources

BASE
FOR SIDE SUPPLY

	BASE
DELIA 1AA	-
DELIA 1A	•
DELIA 1	•
DELIA 2	•
DELIA 3	•
DELIA 4	-
DELIA 5	-

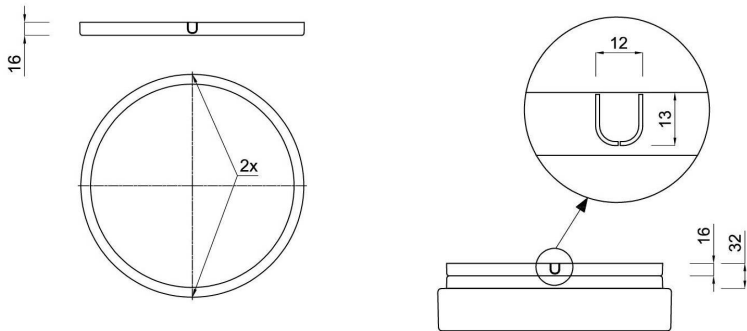










DIMENSIONS
DIMENSIONS OF LUMINAIRE [mm]:



	ØA1	A2
DELIA 1AA	140	65
DELIA 1A	220	70
DELIA 1	300	75
DELIA 2	400	80
DELIA 3	500	85
DELIA 4	650	80
DELIA 5	900	85

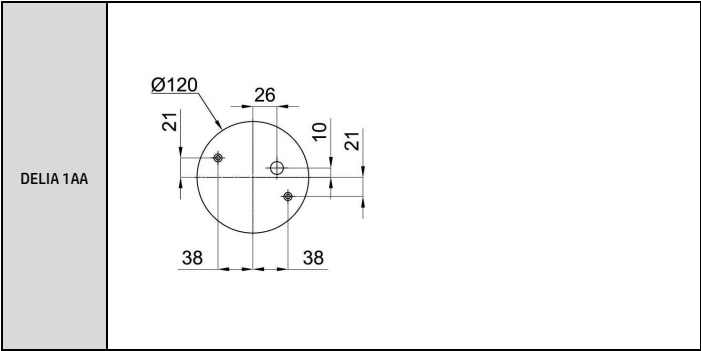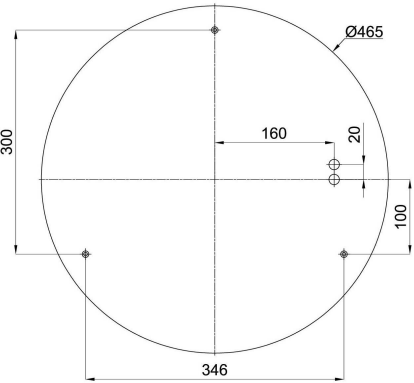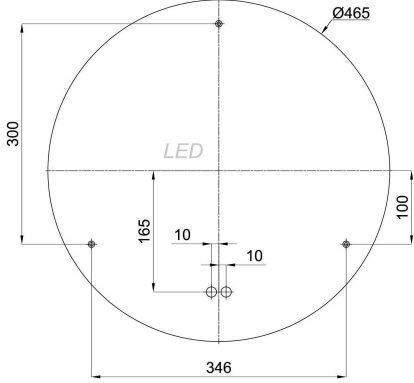MOUNTING DIMENSIONS [mm]:



DELIA 1A	 Ø198 123 10 66 20 41 142	 Ø198 123 50 20 35 41 142
IN-...		LED-...
DELIA 1	 Ø275 174 78 20 58 201	 Ø275 174 110 10 10 58 201
IN-... E-... NK-E-...		LED-...
DELIA 2	 Ø375 243 109 20 81 281	 Ø375 243 135 20 81 281
IN-... E-... NKC-...		LED-...
DELIA 3	 Ø465 300 160 20 100 346	 Ø465 300 165 10 10 100 346
IN-... E-... NKC-...		LED-...

