


SYLVIA 2A, 2



TECHNICAL DATA

Light source	LED module Osmont L28C, L25B	incandescent lamp	fluorescent lamp
Chromaticity temperature	3000K, 4000K	by source	by source
CRI	3000K Ra>80, 4000K Ra>80	by source	by source
Power source	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP44		
Fixture	metal		
Color of fixture	white		
Class II	LED		
Shade	three layers glass with matt surface		
Shade attachment	with folding holders		
Mounting	wall, ceiling		
Applications	housing constructions (rooms, corridors), cultural premises		

VARIANTS

LED:

	Type	Input [w]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Warranty [yrs]*
			3000K	4000K	3000K	4000K	
SYLVIA 2A	LED-1L28C03U11/132.000	11	1380	1460	900	950	5
SYLVIA 2	LED-2L25B07U12/130.000	21	2590	2700	1840	1920	5

STANDARD:

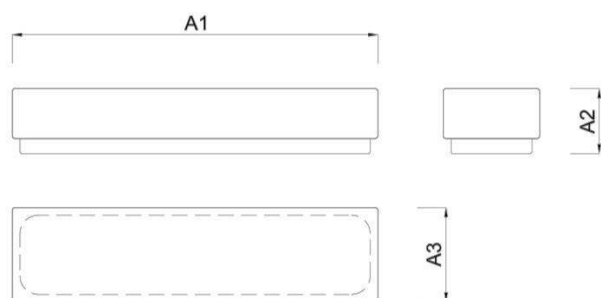
	Type	Input [w]	Socket	Type of lamp
SYLVIA 2A	IN-22U11/132	2x28	2xE14	-
SYLVIA 2	IN-32U12/130	3x28	3xE14	-
	E-16U12/130	24	G5	T5

000 – 3000K or 4000

* - warranty on LED modules and power sources

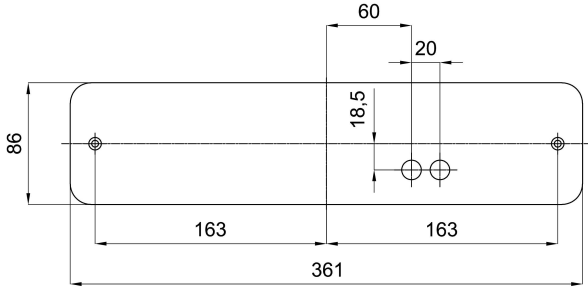
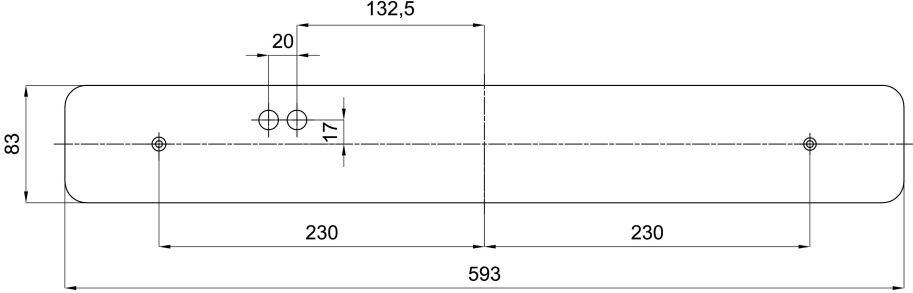
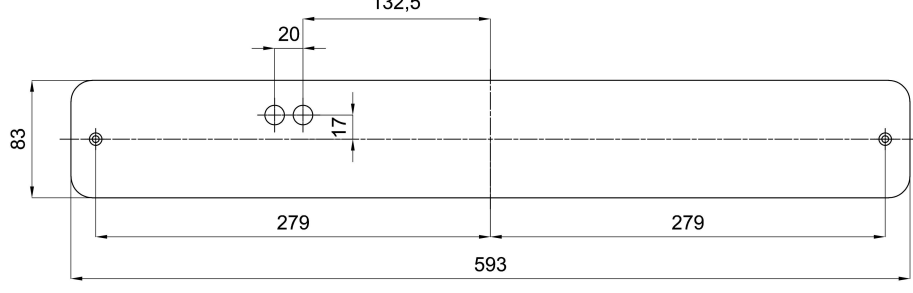
DIMENSIONS

DIMENSIONS OF LUMINAIRE [mm]:



	A1	A2	A3
SYLVIA 2A	380	75	105
SYLVIA 2	610	75	105

MOUNTING DIMENSIONS [mm]:

SYLVIA 2A	
SYLVIA 2	 IN-... E-...
	 LED-...