



ADRIA P1-5, ADRIA L1-5, ADRIA S1-5

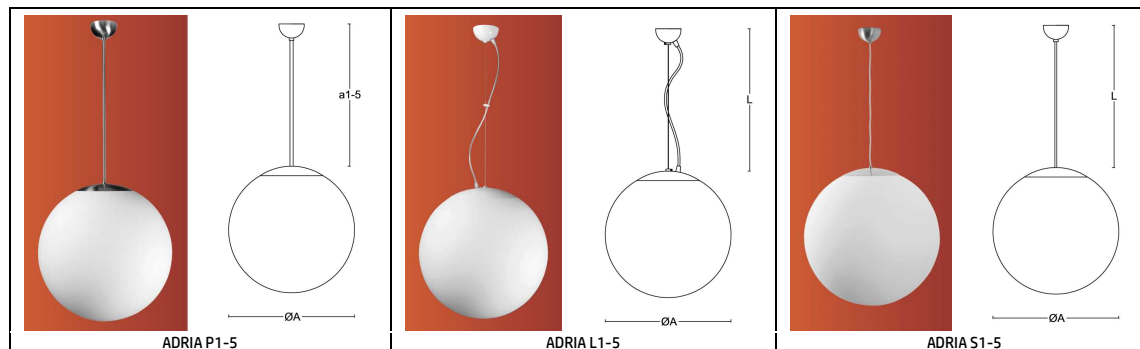

TECHNICAL DATA

Light source	LED module Osmont L05C, L06C, L07C	incandescent lamp	fluorescent lamp
Chromaticity temperatures	3000K, 4000K	-	-
CRI	3000K Ra>80, 4000K Ra>80	-	-
Ballast/LED driver	Tridonic	-	Tridonic
Energy class	A++	by source	by source
Input voltage	230V		
IP	IP 40		
Hanger	ADRIA P – pendant, metal or stainless steel with Ø 10mm ADRIA L – wire, steel wire and transparent power cord ADRIA S – cable, transparent or white cable		
Color	white (B), brass (M5), stainless polished (NL), stainless ground (NB)		
Shade	three layers glass with matt surface		
Shade holder	steel holder with Ø110mm opening (for Ø200,300 mm sizes) steel holder with Ø150mm opening (for Ø400,500,600 mm sizes)		

Type	ØA [mm]
ADRIA P1,L1,S1	200
ADRIA P2,L2,S2	300
ADRIA P3,L3,S3	400
ADRIA P4,L4,S4	500
ADRIA P5,L5,S5	600

ADRIA P		ADRIA L		ADRIA S	
Type	Length [mm]	Type	Length [mm]	Type	Length [mm]
a1	200	L100	1000	L100	1000
a2	400	L200	2000		
a3	600				
a4	800				
a5	1000				

VARIANTS

LED:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Possibility DIM (DALI)	Warranty [yrs]*
			3000K	4000K	3000K	4000K		
ADRIA P1	LED-5L05C05Z11/092/a.x.000	9	1070	1130	950	1000	-	5
ADRIA L1	LED-5L05C05Z11/092/L...x.000							
ADRIA S1	LED-5L05C05Z11/092/L100x.x.000							
ADRIA P2	LED-5L06C04Z11/094/a.x.000	22	2970	3130	2610	2760	•	5
ADRIA L2	LED-5L06C04Z11/094/L...x.000							
ADRIA S2	LED-5L06C04Z11/094/L100x.x.000							
ADRIA P3	LED-5L06C06Z11/096/a.x.000	29	3900	4110	3430	3620	•	5
ADRIA L3	LED-5L06C06Z11/096/L...x.000							
ADRIA S3	LED-5L06C06Z11/096/L100x.x.000							
ADRIA P4	LED-5L07C09Z11/098/a.x.000	44	5880	6200	5170	5450	•	5
ADRIA L4	LED-5L07C09Z11/098/L...x.000							
ADRIA S4	LED-5L07C09Z11/098/L100x.x.000							
ADRIA P5	LED-5L07C10Z11/099/a.x.000	51	6780	7150	5970	6290	•	5
ADRIA L5	LED-5L07C10Z11/099/L...x.000							
ADRIA S5	LED-5L07C10Z11/099/L100x.x.000							

LED emergency combined:

	Type	Input [W]	Luminous flux LED [lm]		Luminous flux of luminaire [lm]		Luminous flux LED in emergency mode		T [hrs]	Type of battery	Warranty [yrs]*
			3000K	4000K	3000K	4000K	[%]	[lm]			
ADRIA P4	LED-5L07C09Z11/098/NK1W/a.x.000	44	5880	6200	5170	5450	3	150	3	NiCd 3,6V/1,6Ah	5
ADRIA L4	LED-5L07C09Z11/098/NK1W/L...x.000										
ADRIA S4	LED-5L07C09Z11/098/NK1W/L100x.x.000										

STANDARD:

	Type	Input [W]	Socket	Type of lamp	Possibility DIM (DALI)
ADRIA P1	Z11/092/a. x	75	E27	-	-
ADRIA L1	ZL11/092/L... x	75	E27	-	-
ADRIA S1	ZS11/092/L100 x	75	E27	-	-
ADRIA P2	Z11/094/a. x	100	E27	-	-
	E-25Z11/094/a. x	2x18	2xG24q2	TC-DEL	-
ADRIA L2	ZL11/094/L... x	100	E27	-	-
	E-25ZL11/094/L... x	2x18	2xG24q2	TC-DEL	-
ADRIA S2	ZS11/094/L100 x	100	E27	-	-
	E-25ZS11/094/L100 x	2x18	2xG24q2	TC-DEL	-
ADRIA P3	Z11/096/a. x	150	E27	-	-
	E-26Z11/096/a. x	2x26	2xG24q3	TC-DEL	*
	E-28Z11/096/a. x	2x42	2xGX24q4	TC-TEL	-
ADRIA L3	ZL11/096/L... x	150	E27	-	-
	E-26ZL11/096/L... x	2x26	2xG24q3	TC-DEL	*
	E-28ZL11/096/L... x	2x42	2xGX24q4	TC-TEL	-
ADRIA S3	ZS11/096/L100 x	150	E27	-	-
	E-26ZS11/096/L100 x	2x26	2xG24q3	TC-DEL	*
	E-28ZS11/096/L100 x	2x42	2xGX24q4	TC-TEL	-
ADRIA P4	Z11/098/a. x	150	E27	-	-
	E-26Z11/098/a. x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46Z11/098/a. x	4x26	4xG24q3	TC-DEL	*
ADRIA L4	ZL11/098/L... x	150	E27	-	-
	E-26ZL11/098/L... x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46ZL11/098/L... x	4x26	4xG24q3	TC-DEL	*
ADRIA S4	ZS11/098/L100 x	150	E27	-	-
	E-26ZS11/098/L100 x 32W	2x32	2xGX24q3	TC-TEL	-
	E-46ZS11/098/L100 x	4x26	4xG24q3	TC-DEL	*
ADRIA P5	Z11/3/099/a. x	3x60	3xE27	-	-
	E-48Z11/099/a. x	4x42	4xGX24q4	TC-TEL	*
ADRIA L5	ZL11/3/099/L... x	3x60	3xE27	-	-
	E-48ZL11/099/L... x	4x42	4xGX24q4	TC-TEL	*
ADRIA S5	ZS11/3/099/L100 x	3x60	3xE27	-	-
	E-48ZS11/099/L100 x	4x42	4xGX24q4	TC-TEL	*

STANDARD emergency combined:

	Type	Input [W]	Socket	Type of lamp	T [hrs]	Type of battery	Light flux in emergency mode [%]
ADRIA P3	NKC-226Z11/13/096/a. x	2x26	2xG24q3	TC-DEL	1	Ni-Cd 3,6V/1,6Ah	6,5
ADRIA L3	NKC-226ZL11/13/096/L... x						
ADRIA S3	NKC-226ZS11/13/096/L100 x						
ADRIA P4	NKC-232Z11/16/098/a. x	2x32	2xGX24q3	TC-TEL	1	Ni-Cd 3,6V/1,6Ah	9
ADRIA L4	NKC-232ZL11/16/098/L... x						
ADRIA S4	NKC-232ZS11/16/098/L100 x						

x – color (B – white, MS – brass, NL – stainless polished, NB – stainless ground)

.000 – 3000K or 4000K

* – warranty on LED modules and power sources